

YH

内螺纹闸阀 Gate Valve 2000WOG

标准 Standards

设计标准/Design:ASME B16.34

壁厚标准/ Wall Thickness:ASME B16.34

螺纹标准/Pipe Thread:ASME B1.20.1,BS21

DIN 2999/259,ISO 228/1 IS B 0203,ISO 7/1

检测标准/ Inspection & Testing: MSS SP-110,EN 12266

产品特点 Features

多种螺纹端供选择

Various Thread Standards Available



不锈钢一体式阀座

Stainless Steel One Piece Seat

采用脱腊精密铸造

Using Dewaxing Precision Casting

No.	Parts		Material	
1	阀体	Body	CF8M	CF8
2	阀瓣	Disc	CF8M	CF8
3	阀杆	Stem	SUS304	SUS316
4	阀体填料	Body Gasket	PTFE	
5	阀盖	Cap	CF8M	CF8
6	阀杆填料	Stem Seal	PTFE	
7	防松螺母	Stop Nut	CF8M	CF8
8	手轮	Wheel Handle	Aluminum	
9	阀杆螺母	Stem Nut	SUS304	
10	填料压套	Washer	SUS304	
11	压盖	Gland	SUS304	
12	防松垫片	Gasket	SUS304	
13	卡簧	Snap Spring	SUS304	

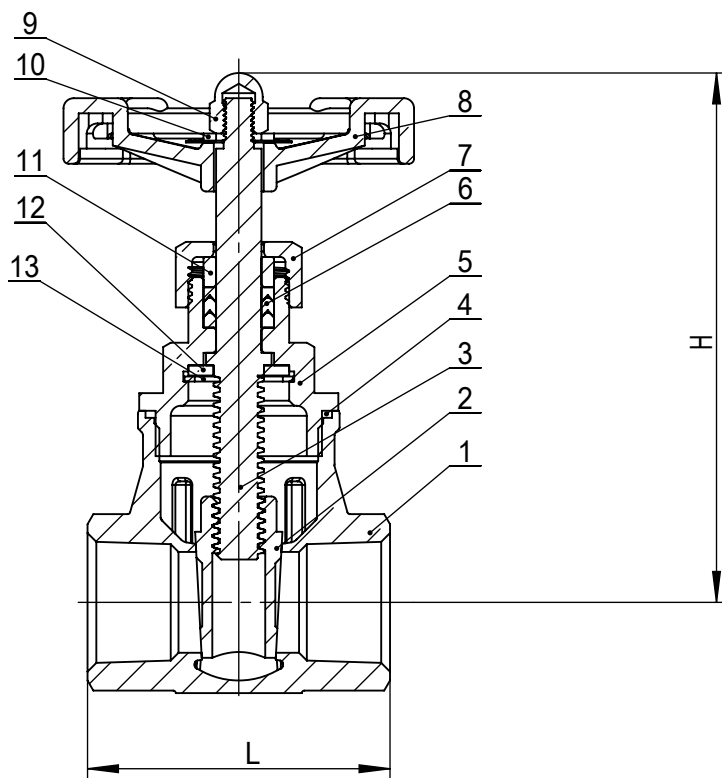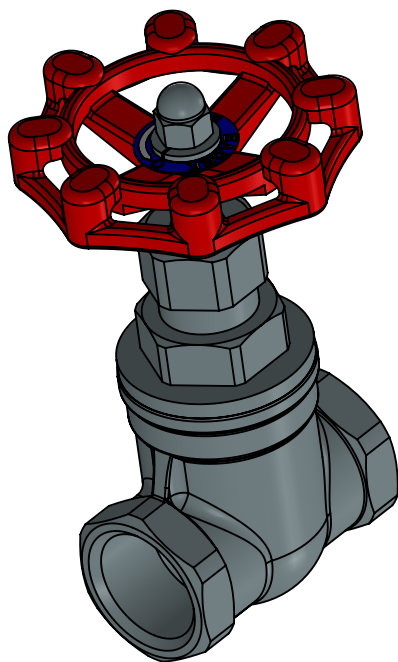

Main Size :

Unit : mm

Size	DN	L	H
1/2"	15	52	97
3/4"	20	57.5	102
1"	25	62.5	114.5
1 1/4"	32	70	125
1 1/2"	40	74.5	140
2"	50	89.5	163